




CURVE FUNZIONAMENTO - PERFORMANCE CURVES

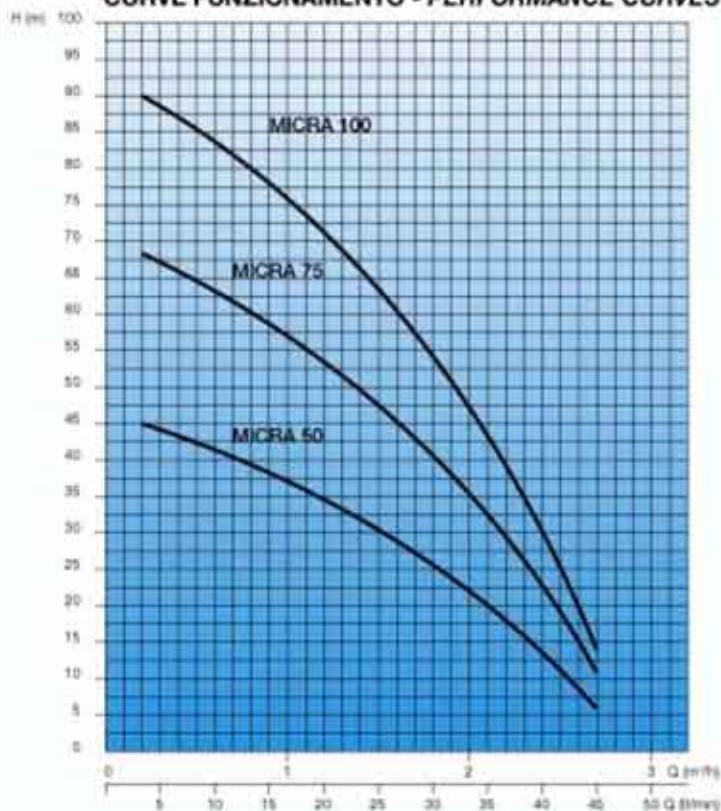

DIMENSIONI E PESI DIMENSIONS AND WEIGHTS

	Lunghezza L Length mm	Peso Weight kg
MICRA 50 M/T	930	9.8
MICRA 75 M/T	1145	11
MICRA 100 M/T	1390	12

CARATTERISTICHE IDRAULICHE (50 HZ) HYDRAULIC PERFORMANCES (50 HZ)

PORTATA l/min. CAPACITY m³/h	5	10	15	20	30	40	45
	0.3	0.6	0.9	1.2	1.8	2.4	2.7
PREVALENZA MANOMETRICA m.c.s. TOTAL MANOMETRIC HEAD m.w.c							
MICRA 50	45	41	38	35	27	14	6
MICRA 75	58	54	50	44	42	23	11
MICRA 100	90	84	78	72	56	30	14

CARATTERISTICHE ELETTRICHE - ELECTRIC PERFORMANCES

Monofase Single-phase 230 V / 50 Hz	P1 Input Watt	I Rated Amp.	Cap Cond microF	Trifase Three-phase 400 V / 50 Hz	P1 Input Watt	I Rated Amp.
MICRA 50M	625	3.3	12	MICRA 50T	600	1.3
MICRA 75M	950	5.1	16	MICRA 75T	900	1.85
MICRA 100M	1200	6.1	20	MICRA 100T	1150	2.4