


# MAXI HC

## Single channel impeller for 76mm solids handling

The 400/3/50 Maxi HC submersible is designed for heavy duty applications with pumped media containing solids in suspension up to 76mm dia at temperatures up to 40°C and densities to 1.2kg/dm<sup>3</sup>.

It features a single channel impeller designed for high hydraulic efficiency mounted on a reduced length shaft.

- G250 cast iron construction
- Mechanical seal - silicon carbide/carbide
- Lip seal and O-rings in Nitrile
- Oil chamber
- Asynchronous 3-phase motor suitable for >15 starts per hour
- 10 metres Neoprene HO7RN-F cable as standard
- Guiderail and Eex d IIB T4 versions available.

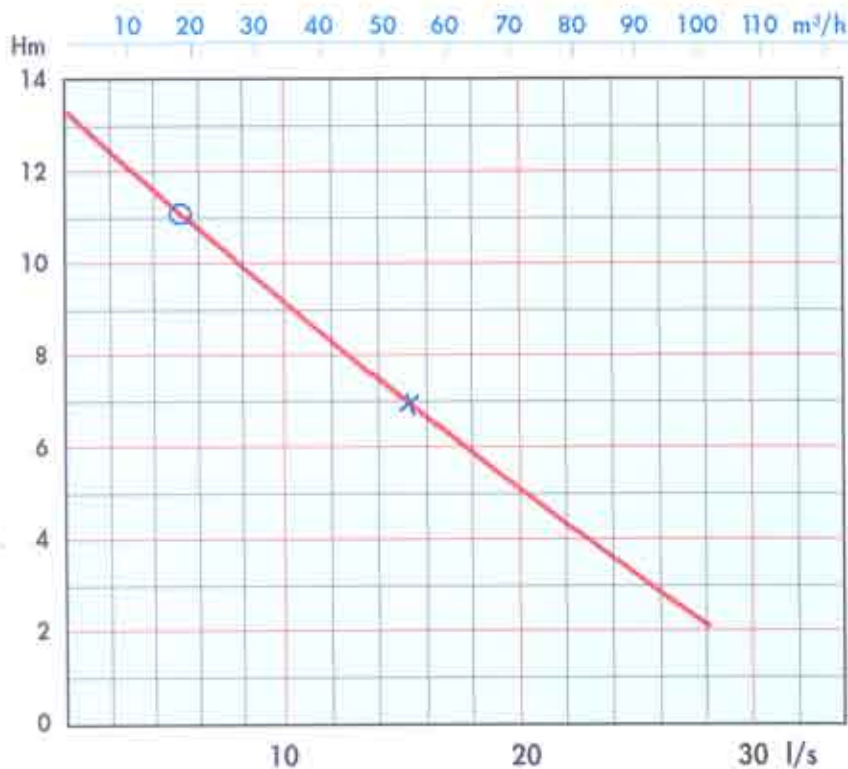

MODEL	kW Nom. P <sub>2</sub>	Nom. Amps	Weight Kg	Best Efficiency		
				kW	mH	l/s
MAXI HC	2.8	6.5	70	2.6	7.0	15

