


MAXI HG

Double channel impeller for 80mm solids handling

The 400/3/50 Maxi HG submersible is designed for heavy duty applications with screened waste or drainage water containing solids in suspension up to 80mm dia at temperatures up to 40°C.

It features a double channel impeller designed for high hydraulic efficiency mounted on a reduced length shaft.

- G250 cast iron construction
- Mechanical seal - silicon carbide/carbide
- Lip seal and O-rings in Nitrile
- Oil chamber
- Asynchronous 950 rpm motor suitable for >15 starts per hour
- 10 metres Neoprene HO7RN-F cable as standard
- Freestanding and Guiderail options available.

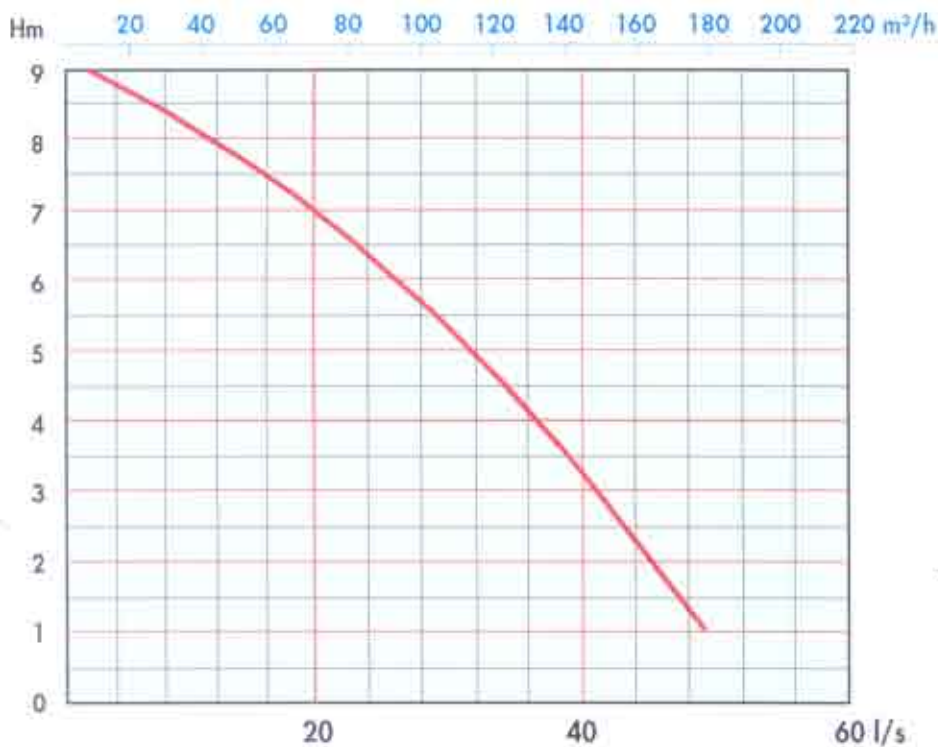

MODEL	kW		Nom. Amps	Weight Kg	Best Efficiency		
	P ₁	P ₂			kW	mH	m³/hr
MAXI HG	3.0	2.3	6.0	118	2.7	6.1	90.0

