




# MAXI HO

## Single channel impeller for 78mm solids handling

The 400/3/50 Maxi HO submersible is designed for heavy duty applications with screened waste or drainage water containing solids in suspension up to 78mm dia at temperatures up to 40°C.

It features a single channel impeller designed for high hydraulic efficiency mounted on a reduced length shaft.

- G250 cast iron construction
- Double Mechanical seal - silicon carbide/carbide
- O-rings in Nitrile
- Oil chamber
- Asynchronous 1450 rpm motor suitable for >15 starts per hour
- 10 metres Neoprene HO7RN-F cable as standard
- Freestanding and Guiderail options available.

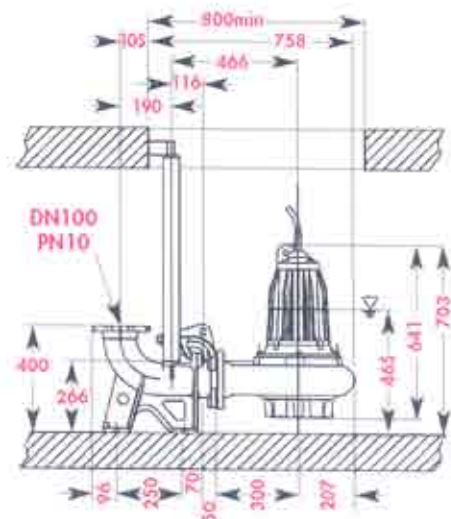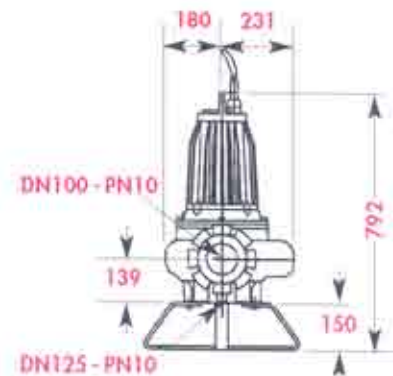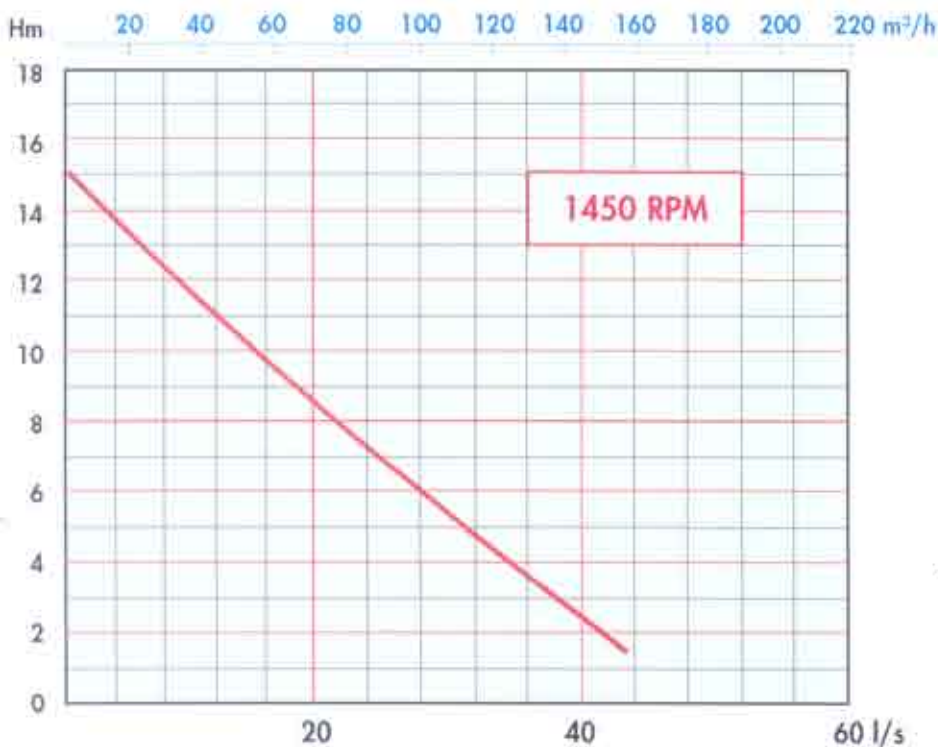

MODEL	Nominal kW	Nom. Amps	Weight Kg	Best Efficiency		
				kW	mH	m³/hr
MAXI HO	4.6	9.5	117	4.0	7.2	85.0