


REGAL STAINLESS DRAINAGE PUMPS



TECHNICAL DATA						
MODEL	NOMINAL		DIMENSIONS mm			WEIGHT
240/1	kW	HP	A	B	C	Kg
RGL 30	0.25	0.33	150	220	1"BSP	4.0
RGL 40	0.3	0.4	155	240	1¼"BSP	5.5
RGL 60	0.45	0.6	155	240	1¼"BSP	6.2
RGL 80	0.6	0.8	210	300	1½"BSP	9.0
RGL 100	0.75	1.0	210	300	1½"BSP	11.0

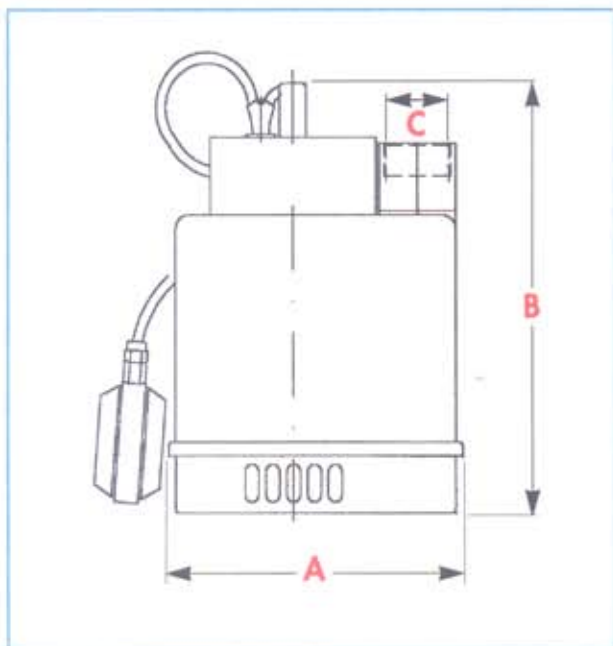

RGL 30



RGL 40/60



RGL 80/100



Other drainers and contractors pumps in the range include:

YACHT - Plastic bilge pumps designed to handle difficult hydrocarbons laden seawater.

- 12 and 24 Volt models • Heads to 4m • Flows to 73 l/m • Weigh just 0.9kg and 1.8kg

SKUBA - Plastic drainage pumps for clean water applications.

- 240/1/50 • Heads to 8m • Flows to 140 l/m

TELKA - Plastic drainage pumps for tight sumps. 5-10mm Solids handling

- 240/1/50 • Heads to 8m • Flows to 240 l/m

DISCOVERY - Cast iron drainage pumps for high head applications.

- 110/1/50, 240/1/50, 415/3/50 • Heads to 70m • Flows to 550 l/m

SIME - Drainers and contractors site pumps for sandy or muddy water.

- 110/1/50, 240/1/50, 415/3/50 • Heads to 22m • Flows to 1400 l/m

SIGMA KDFU - Heavy duty drainers and contractors site pumps.

- 415/3/50 • Up to 15% solids by volume • Heads to 30m • Flows to 2200 l/m

TOYO - Dredging pumps with integral agitator. Solids handling up to 30mm.

- For civil engineering/mining applications • Heads to 27m • Flows to 1700 l/m.

