


SEMISOM 265L/365L/450L

submersible pumps for dirty water and sewage



These Semisom submersible pumps have been designed for arduous dirty water and sewage type applications.

They feature vortex impellers providing maximum solids handling capability of 35mm, 35mm and 50mm respectively.

- Cast iron/Stainless steel construction • Coolant filled motor • Mechanical seal
- 5 metre cable on all 230/400V models, 10 metre on 110V models
- Float switch as standard on single phase models • Choice of bare cable or UK plug unit incorporating capacitor and thermal trip on 230V
- *Special audible/visual alarm control box available - ask for details*

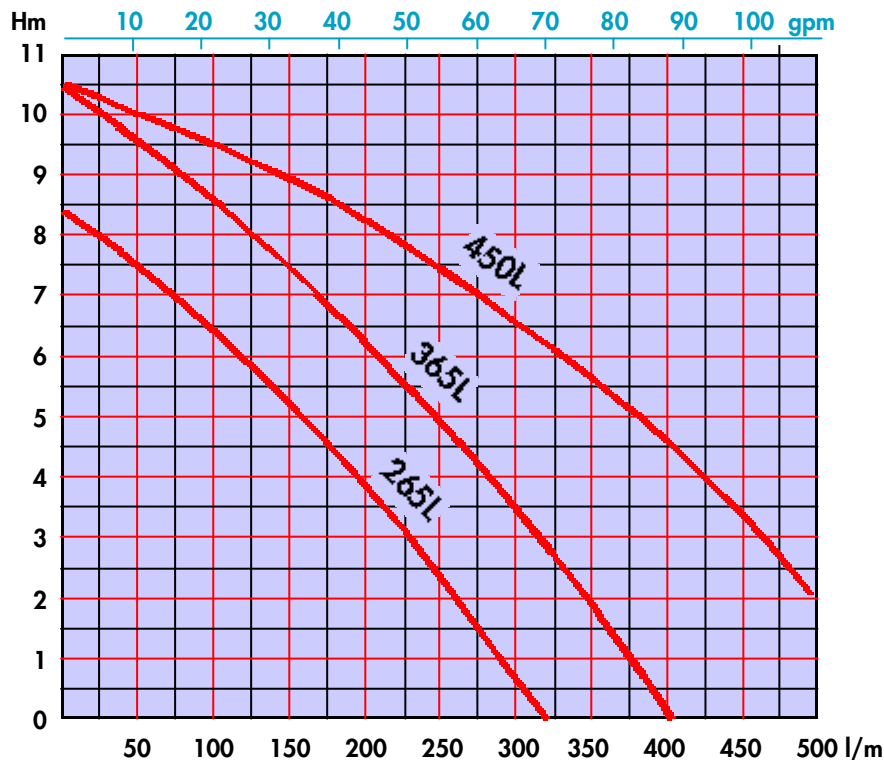

A horizontal outlet version of the 450L is also available.

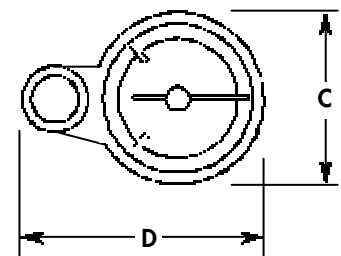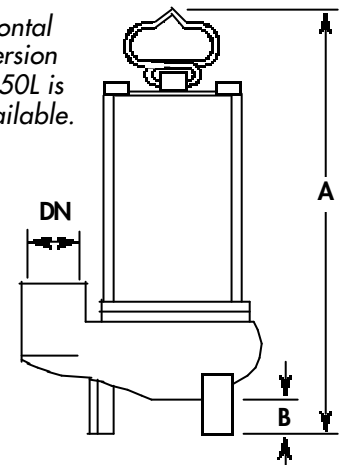

TECHNICAL DATA											
MODEL	NOMINAL		NOMINAL AMP			DIMENSIONS mm					WEIGHT Kg
	kW	HP	110V	230V	400V	A	B	C	D	DN	
265L	0.55	0.75	8.5	4.2	1.7	400	50	162	230	1½"	13.5
365L	0.75	1.0	13.0	5.5	2.3	440	50	162	230	1½"	16.5
450L	1.1	1.5	14.5	7.3	2.7	464	50	183	260	2"	19.2